

### Open Under Bench Installation

**Please Note:** If the appliance is installed in a closed cupboard space, large adequate ventilation is required to validate the warranty

## SITE REQUIREMENT


- ① Drainage 40mm Tundish - Max Height 200mm
- ② Mains Cold Water Isoltion Tap
- ③ 240V Power Outlet

## MODELS

GL1300 = 650H x 410W x 630D

GL2000 = 650H x 520W x 750D

GL5000 = 1080H x 640W x 660D

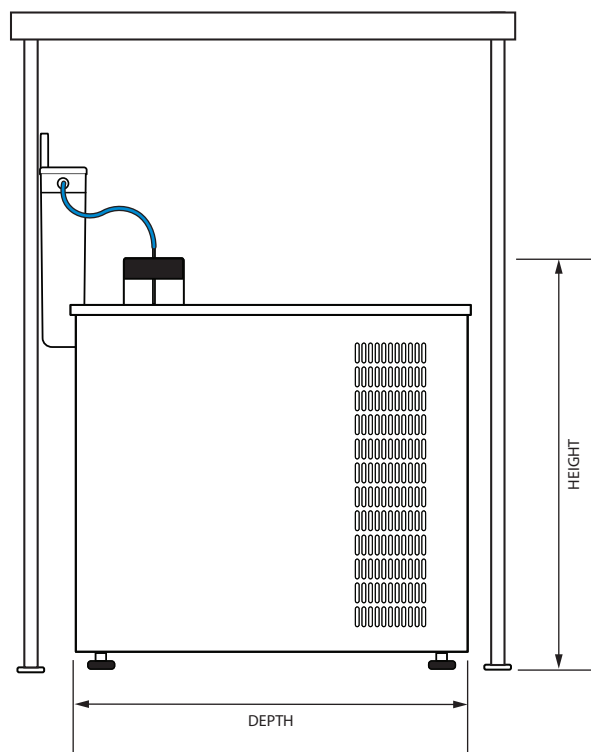

**N.B.** When trimming tubes to length - to ensure NO LEAKS use a sharp tube cutter for a clean cut  
ALL DIMENSIONS GIVEN ARE IN MM.